

Single Phase | High Speed | SS Body


# Openwell Submersible Monobloc Pumpset



# DOLPHIN



Parameters	Range
Power Rating	0.5 - 1.0 hp
Head Range	6 - 32 m
Discharge Range	30 - 210 lpm
Voltage	230 V (-15% to +6%)
Speed	2900 rpm

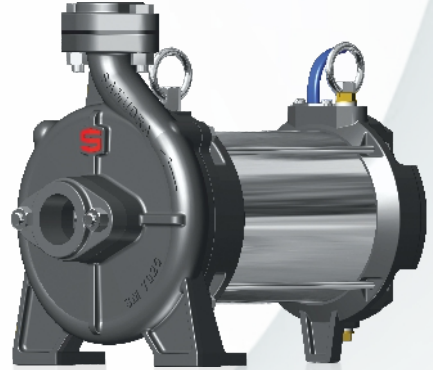


## SALIENT FEATURES

- Rigid cast iron casing
- All casting are in superior FG 260 grade
- Ease of installation and trouble free maintenance
- High efficiency with wide operating range
- Water lubricated carbon journal bushes and SS + carbon thrust bearing unit
- Portable light weight construction with sturdy stainless steel stator housing

## OPERATING CONDITIONS

- Pump set should be submerged in water with minimum of 0.5 m

## APPLICATIONS



Pumping from small  
pond to openwells



Water circulating  
systems



Fountains, Lawns  
and Gardens



Lifting water from sump to  
overhead tanks

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

**SAMUDRA PUMPS (INDIA) PVT LTD**

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore - 641 045, Tamilnadu, India

E-Mail: [info@samudrapumps.com](mailto:info@samudrapumps.com) | +91 422 498 2255