


Three Phase

Induction Aerator Motor



*Available in X series

Parameters	Range
Power Rating	2.0 hp
Class of Insulation	F Class (155°C)
Motor Protection Class	TEFC (IC411)
Temperature Rise	Limited to Class B (130°C)
Voltage	415 V (-15% to +6%)
Speed	1420 rpm

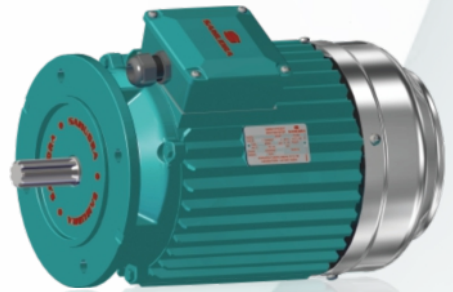

SALIENT FEATURES

- TEFC, 3 phase squirrel cage induction flange mounted motor
- Shaft extension is splined, specially designed for paddle wheel aerator applications
- Dynamically balanced rotors
- Rigid cast iron construction with SS fan shield
- IP 55 class of protection
- F - class insulation
- Provided with thermal overload protector

APPLICATIONS



Agriculture machinery



Aquaculture



Flour Mills



Machine Tools
Industries

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045. Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255