

Single Phase | Slow Speed


Borewell Mono Compressor Pumpset



► SMCS

*Available in X series

Parameters	Range
Power Rating	1.0 - 1.5 hp
Head Range	30.5 - 122 m
Discharge Range	15 - 70 lpm
Voltage	220 V (-15% to +6%)
Pipe Size	Air Pipe - 12 mm Del. Pipe - 25 mm

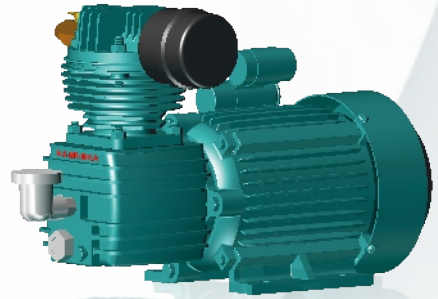

SALIENT FEATURES

- Easy installation and maintenance
- Robust in construction with standing overload
- Requires no priming
- Can be installed in more than one bore based on the water leaves
- Rigorous quality control check checks at every stage of manufacturing to ensure high degree of reliability
- Dynamic balancing of rotors ensure vibration free Performance

APPLICATIONS



Domestic



Flood irrigation



Low yield borewell



Agriculture

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045. Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice