

Samudra PVC 3 Core Flat Submersible Cable



SAMUDRA PLUS+


Parameters	Range
Size	1, 1.5, 2.5, 4.0, 6, 8, 10, 16, 25 sq.mm
Standard	ISI - IS:694
Conductor	Plain Annealed Bare Copper Conductor as per IS:8130
Insulation	PVC
Core Colour	Red / Yellow / Blue

SALIENT FEATURES

- Assured electricity saving
- Full gauge guarantee
- Highly abrasion resistance
- ABS Excelled insulating properties
- High grade & pure copper conductor
- Abrasion resistance grade sheath material
- Long life & high durability
- Higher temperature index



IS 694 : 2010

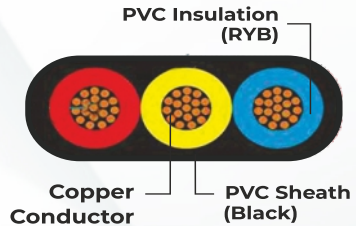

APPLICATIONS



Open Well



V3, V4, V6 & V8 Bore Well

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice