

Single Phase I High Speed

Centrifugal Monobloc Pumpset




► SCS

► SCM

*Available in X, NX, N, NV, V series

Parameters	Range
Power Rating	0.5 - 2.0 hp
Head Range	4 - 36 m
Discharge Range	12 - 1720 lpm
Voltage	220 V (-15% to +6%)
Speed	2850 rpm




SALIENT FEATURES

- TEFC design with class 'B' insulation
- Double shielded deep groove ball bearing
- Rigid cast iron parts
- High efficiency with wide operating range
- Lowest power consumption
- Noise free operation

OPERATING CONDITIONS

- Liquid temperature up to 60°C
- Ambient temperature up to 45°C
- Maximum suction head up to 6 meters continuous duty

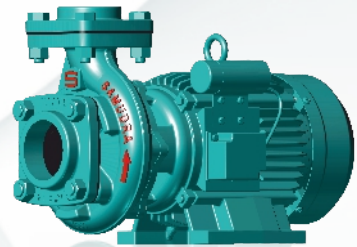

APPLICATIONS



Small farms,
Lawns and gardens



Pressure boosting
system



Domestic water supply,
Residential bungalows



Water circulation
system

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore - 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255