

Single Phase | Slow Speed


Borewell Belt Compressor Pumpset



► SBCS

*Available in X, N series

Parameters	Range
Power Rating	1.5 - 2.0 hp
Head Range	30.5 - 122 m
Discharge Range	16 - 130 lpm
Voltage	220 V (-15% to +6%)
Pipe Size	Air Pipe - 12 mm Del. Pipe - 25 mm

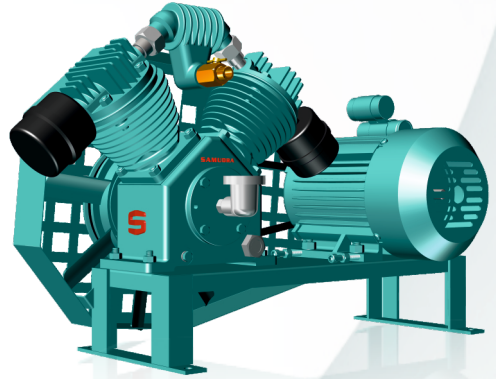

SALIENT FEATURES

- Available in single and double cylinder
- Easy installation and maintenance
- Dynamic balancing of rotors ensure vibration free
- Robust in construction with standing overload
- Requires no priming
- It can be installed in more than one bore based on the water level
- Rigorous quality control checks at every stage of manufacturing to ensure high degree of reliability
- Easy belt alignment of compressor with the motor ensuring higher efficient and close to zero maintenance

APPLICATIONS



Domestic



Flood irrigation



Agriculture

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255