


Single Phase | High Speed | SS Body

Openwell Submersible Monobloc Pumpset



DOLPHIN

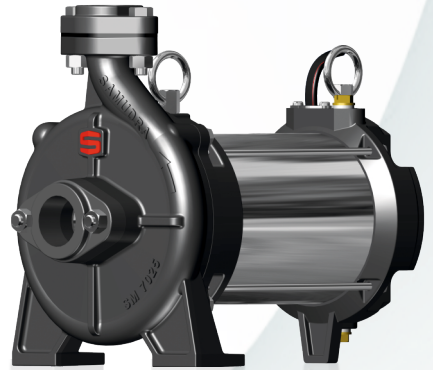

Parameters	Range
Power Rating	0.5 - 1.0 hp
Head Range	6 - 32 m
Discharge Range	30 - 210 lpm
Voltage	230 V (-15% to +6%)
Speed	2900 rpm


SALIENT FEATURES

- Rigid cast iron casing
- All casting are in superior FG 260 grade
- Ease of installation and trouble free maintenance
- High efficiency with wide operating range
- Water lubricated carbon journal bushes and SS + carbon thrust bearing unit
- Portable light weight construction with sturdy stainless steel stator housing

OPERATING CONDITIONS

- Pump set should be submerged in water with minimum of 0.5 m

APPLICATIONS



Pumping from
small pond



Fountains, Lawns
and Gardens



Lifting water from sump
to overhead tanks

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore - 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255