

Three Phase


High Speed Monobloc Pumpset



► SMH

*Available in X & NX series

Parameters	Range
Power Rating	2.0 - 10.0 hp
Head Range	4 - 72 m
Discharge Range	5.5 - 35 lps
Voltage	415 V (-15% to +6%)
Speed	2900 rpm

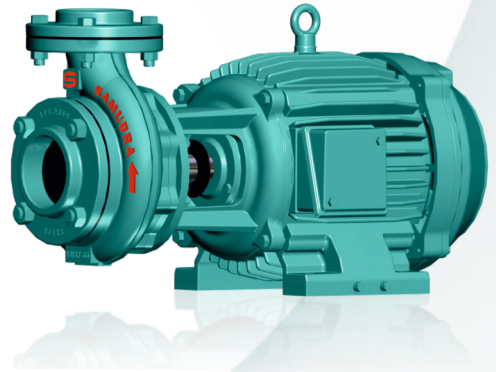

SALIENT FEATURES

- FG 260 for higher durability
- Improved hydraulic performance
- Aluminum pressure die-cast rotors
- (SKF) ball bearing & dynamically balanced rotors
- Class "F" winding ensure long trouble - free operation in low temperature
- Heavy duty fasteners ensures enhanced life
- Ease of serviceability and minimal maintenance

APPLICATIONS



Sprinkler, Drip and Open Irrigation



Fountains, Lawns and Gardens



Water circulation system

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255