

Three Phase I High Speed

Openwell Submersible Monobloc Pumpsets

► SSM



SAMUDRA

*Available in **X, NX, N, NV & V** series

Parameters	Range
Power Rating	1.0 - 15.0 hp
Head Range	6 - 80 m
Discharge Range	3 - 46 lps
Voltage	350/415 V (-15% to +6%)
Speed	2900 rpm

- X** Series up to 15 hp
- V** Series up to 7.5 hp
- N** Series up to 10 hp

SALIENT FEATURES

- Energy efficient motors and pumps
- Wide operating voltage band
- Robust design for better rigidity
- Increased water volume for better cooling
- Optimized diaphragm design
- Three layer protection to avoid sand entry into motor
- Increased life with high grade cast iron components - FG 260
- Superior construction for easy installation and easy serviceability
- Heavy duty water lubricated journal carbon bushes and thrust bearing for long trouble free operation

APPLICATIONS





Sprinkler, Drip and Open Irrigation



Fountains, Lawns and Gardens



Water supply in apartments & buildings

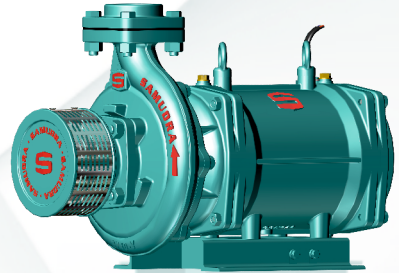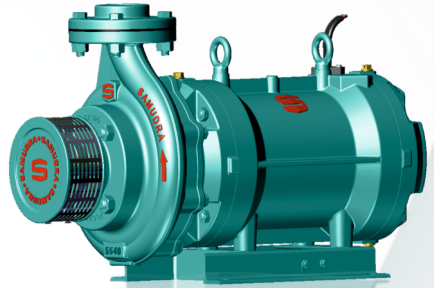

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045. Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255