

Three Phase I High Speed


# Horizontal Submersible Multistage Pumpset



► SHSM

\*Available in V series

Parameters	Range
Power Rating	3.0 - 7.5 hp
Head Range	15 - 63 m
Discharge Range	3 - 13.5 lps
Voltage	380 V (-15% to +6%)
Speed	2800 rpm

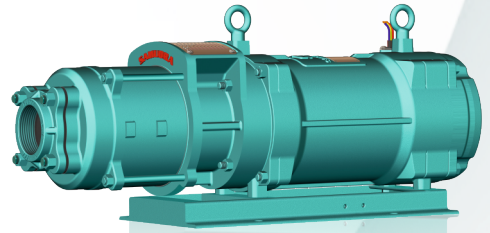

## SALIENT FEATURES

- Energy efficient motors and pumps
- Wide operating voltage band
- Robust design for better rigidity
- Increased water volume for better cooling
- Three layer protection to avoid sand entry into motor
- Increased life with high grade cast iron components - FG 260
- Superior construction for easy installation and easy serviceability
- Heavy duty water lubricated journal carbon bushes and thrust bearing for long trouble free operation
- Independent construction of pump & motor which is advantageable of pairing different stage of pumps with the same hp related motors

## APPLICATIONS



Sprinkler, Drip and  
Open Irrigation



Fountains, Lawns  
and Gardens



Water supply in  
apartments & buildings

In View of continuous developments, the given information / descriptions are subject to change without prior notice

**SAMUDRA PUMPS (INDIA) PVT LTD**

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: [info@samudrapumps.com](mailto:info@samudrapumps.com) | +91 422 498 2255