

Samudra PVC 3 Core Flat Submersible Cable



Parameters	Range
Size	1.5, 2.5, 4.0, 6.0, 8.0, 10.0 sq.mm
Standard	ISI - IS:694
Conductor	Plain Annealed Bare Copper Conductor as per IS:8130
Insulation	PVC
Core Colour	Red / Yellow / Blue




SALIENT FEATURES

- Assured electricity saving
- Full gauge guarantee
- Highly abrasion resistance
- ABS Excelled insulating properties
- High grade & pure copper conductor
- Abrasion resistance grade sheath material
- Long life & high durability
- Higher temperature index



IS 694 : 2010

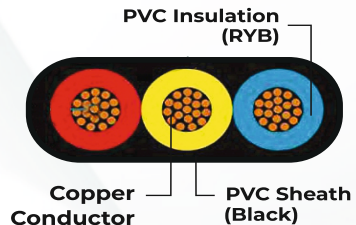

APPLICATIONS



Open Well



Bore Well



Monobloc

SAMUDRA PUMPS (INDIA) PVT LTD

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: info@samudrapumps.com | +91 422 498 2255