

Single Phase I High Speed

# Centrifugal Monobloc Pumpset



► SCM

Parameters	Range
Power Rating	2.0 hp
Head Range	8 - 24 m
Discharge Range	60 - 618 lpm
Voltage	220 V (-15% to +6%)
Speed	2850 rpm

## SALIENT FEATURES

- TEFC design with class 'B' insulation
- Double shielded deep groove ball bearing
- Rigid cast iron parts
- High efficiency with wide operating range
- Lowest power consumption
- Noise free operation

## OPERATING CONDITIONS

- Liquid temperature up to 60°C
- Ambient temperature up to 45°C
- Maximum suction head up to 6 meters continuous duty

## APPLICATIONS




Fountains, Lawns and Gardens



Small Pressure boosting system



Lifting water from sump to overhead tanks

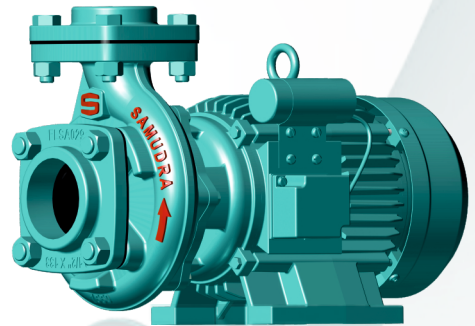

In View of continuous developments, the given information / descriptions are subject to change without prior notice

**SAMUDRA PUMPS (INDIA) PVT LTD**

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045, Tamilnadu, India

E-Mail: [info@samudrapumps.com](mailto:info@samudrapumps.com) | +91 422 498 2255