

Single Phase I High Speed

# Borewell Submersible Pumpset (80 mm)



► SRT

\*Available in **N, NV** series

Parameters	Range
Power Rating	1.0 hp
Head Range	10 - 69 m
Discharge Range	12 - 96 lpm
Voltage	200 V (-15% to +6%)
Speed	2800 rpm

## SALIENT FEATURES

- More durability and hygiene
- High operating efficiency
- Specially designed thrust bearing withstand high axial thrust load
- Fitted with water lubricated bearing
- Suitable for Ø 80 mm borewells or unsized Ø 100 mm borewells

## APPLICATIONS



Open, Sprinkler, Drip and lift Irrigation




large multistoried apartments



Industrial water supply



Pressure boosting system

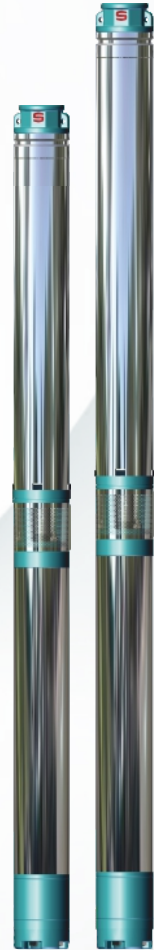

In View of continuous developments, the given information / descriptions / specifications are subject to change without prior notice

**SAMUDRA PUMPS (INDIA) PVT LTD**

Registered office: 1st Floor, Door No.737/2, Sai Aashrya, Puliyakulam Road, Coimbatore – 641 045. Tamilnadu, India

E-Mail: [info@samudrapumps.com](mailto:info@samudrapumps.com) | +91 422 498 2255